



PART NUMBER

PFF60-301

DESCRIPTION

FRONT LOWER WISHBONE BUSH**FITTING INSTRUCTIONS****Product description:****PFF60-301 - FRONT LOWER WISHBONE BUSH (x4)****Contents (parts per pack):**


- 8 x bushes
- 4 x metal outer shells
- 4 x stainless steel inner sleeves
- 8 x washers
- 1 x grease

Please read the complete fitting instructions and check package components before fitment. These fitting instructions are to be used as a guide and in conjunction with workshop manual. It is recommended that:

- all work to be carried out by a licensed technician;
 - all safety precautions adhered to;
 - wheel alignment to be checked and adjusted as required after any suspension work.
- All fasteners must be tensioned to manufacturer's torque settings.*

**Fitting Instructions:**

1. Remove the arm from the car, the complete original bushes need to be pressed out of the arm including the outer shell. The original bushes are flared out on the out side end and will need to be removed from the inside outwards. Make sure the original bushes are pressed out squarely so as not to distort the holes in the arm
2. Clean bore of any burrs or dirt to leave a clean, dry finish
3. Press the new metal outer sleeves squarely into the clean, vacant holes in the wishbone until the larger diameter meets the wishbone. This must be done starting from the inside of the wishbone, pushing outwards so the larger diameter stops on the inside edge.
4. Hand fit the Powerflex bushes into the metal shells.
5. Lubricate the bore of the new bush with grease supplied and push new inner sleeve inside the bush.
6. Lubricate the end faces of the bushes, while fitting the arm back onto the car place one washer at each end of the bush.
6. Finish fitting the wishbone back to the car using the original nut's and bolt's etc.
7. Tighten all hardware to manufacturer's original torque settings

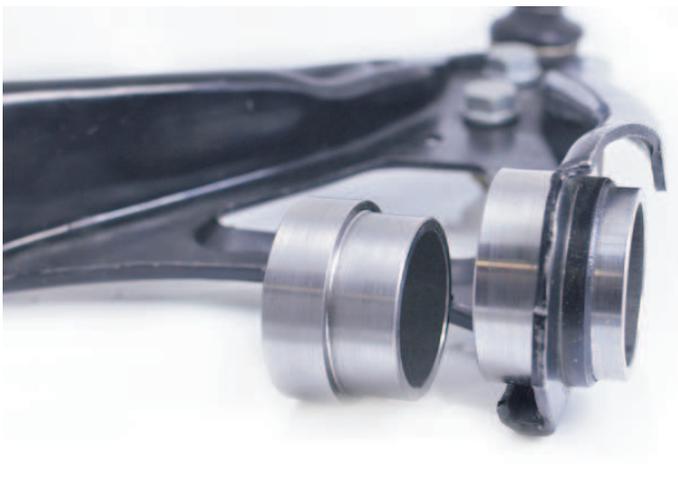

Fit outer shell into arm this way

PFF60-301 fitted with washers
Ready to fit back onto car.