

PART NUMBER

PFR5-4611M3

DESCRIPTION

E46 M3 REAR SUBFRAME REAR BUSH

INSTALLATION GUIDE

Contents (parts per pack):

2 x Polyurethane A Bushes 1 x PTFE/Silicone Grease

2 x Polyurethane B Bushes 2 x Stainless Steel Sleeves


Please read the complete fitting instructions and check package components before fitment. These fitting instructions are to be used as a guide and in conjunction with workshop manual. It is recommended that:

- -all work to be carried out by a licensed technician;
- -all safety precautions adhered to;
- -wheel alignment to be checked and adjusted as required after any suspension work.
- -All fasteners must be tensioned to manufacturer's torque settings.

Fitting Instructions:

- 1. Remove the original rubber bush from the rear subframe rear position.
- 2. Clean any dirt and corrosion from the bore of the subframe and file off any sharp edges.
- 3. Fit the upper polyurethane part A into the subframe from the upper chassis side.
- 4. Fit the lower polyurethane part B into the subframe from the lower road side (identified by a recess in the middle of the lower face).
- 5. Apply the supplied grease into the bore of the polyurethane bush and the upper and lower faces of the bush.
- 6. Insert the stainless steel sleeve into the polyurethane bush so that it sits flush.
- 7. Refit the subframe back to the vehicle, using the original bolt and washer and tension all hardware to manufacturers recommended torque settings.








Figure 1

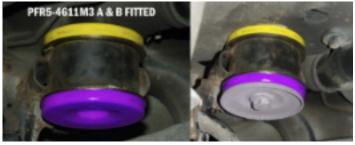


Figure 2