

PART NUMBER

PFF1-1002G

DESCRIPTION

FRONT WISHBONE REAR BUSH - CASTER OFFSET

INSTALLATION GUIDE

Contents (parts per pack):

- 2 x Polyurethane Bushes 1 x PTFE/Silicone Grease
- 2 x Stainless Steel Sleeves

Please read the complete fitting instructions and check package components before fitment. These fitting instructions are to be used as a guide and in conjunction with workshop manual.

It is recommended that:

- -all work to be carried out by a licensed technician;
- -all safety precautions adhered to;
- -wheel alignment to be checked and adjusted as required after any suspension work.
- -All fasteners must be tensioned to manufacturer's torque settings.

Fitting Instructions:

- 1. Remove the original bush from the arm.
- 2. Clean any dirt and corrosion from the bore of the arm and file off any sharp edges.
- 3. Push in the new polyurethane bush from the top side, as shown in Figure 1. Push the bush in at a slight angle for an easier fitting.

Tip: Apply some washing up liquid to the bush for ease of fitting.

- 4. Apply some of the supplied grease to the bore of the polyurethane bush.
- 5. Press the stainless steel sleeve into the bore of the bush.
- 6. For maximum caster adjustment, place the bore of the sleeve towards the middle of the car.
- 7. Re-fit the arm to the car and tension all hardware to manufacturers recommended torque settings.



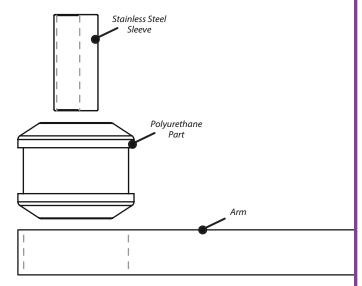


Figure 1




Figure 2 - for maximum caster adjustment

POWERFLEX +44 (0) 1895 460033 sales@powerflex.co.uk www.powerflex.co.uk